



# DC




## ULTRA-HIGH PERFORMANCE MD9238 series

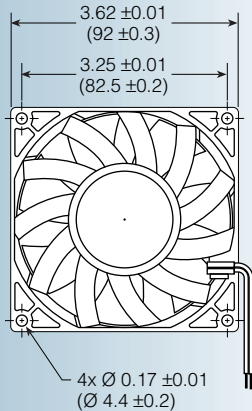

**Size: (92 x 92 x 38 mm)**  
**3.62 x 3.62 x 1.5 inches**

- Features:** *unique high performance design*
- Construction:** UL94V-0 PBT impeller & frame
- Bearing option:** ball bearing
- Connection:** AWG 24, UL1007 lead wires
- Frame:** flanged
- Protection:** thermal
- Options:** tachometer output or locked rotor alarm signal

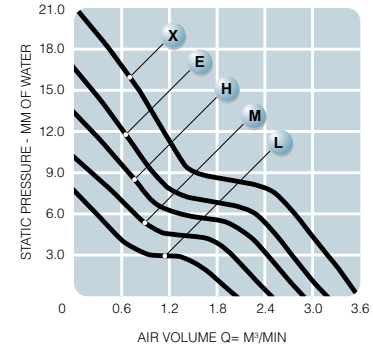

Operating temperature range: -10°C ~ 60°C

Model No.	Rated Voltage V	Current mA			Revolution RPM	Air Volume		Max Static Pressure (H <sub>2</sub> O)		Sound Noise	Weight
		12	24	48		M <sup>3</sup> /Min	CFM	MM	INCH	dBA	g
MD9238L	12/24/48	360	190	100	3,200	2.01	71.06	7.86	0.31	44.5	180
MD9238M	12/24/48	580	300	150	3,800	2.46	86.85	10.24	0.40	50.0	180
MD9238H	12/24/48	880	450	250	4,400	2.85	100.69	13.73	0.60	53.5	180
MD9238E	12/24	1000	500	-	4,800	3.13	110.56	16.93	0.67	55.0	180
MD9238X	24	-	700	-	5,400	3.50	123.57	21.39	0.84	58.4	180



**Power-Plus Technical Distributors**

**800-963-0066**

**www.power-plus.com**